


## ADAN

Adjustable downlights

design Roberto Mantovani



The Adan range combines extreme compactness with a brightness suitable for general lighting. With its IP65 rating, it can be used in wet areas. Available in seven finishes, four colour temperatures and two extremely clean and high-performing optic varieties.

La gamma Adan combina dimensioni estremamente ridotte a flussi luminosi tali da prestarsi ad illuminazioni generali. Grazie al grado IP65 può essere impiegato in zone umide. Disponibile in sette finiture, quattro temperature colore e due ottiche estremamente pulite e performanti.

La gamme Adan combine des dimensions extrêmement réduites à flux lumineux qui lui permettent de se prêter à des éclairages généraux. Grâce au degré IP65, elle peut être employée dans des zones humides. Disponible dans sept finitions, quatre températures couleur et deux optiques extrêmement propres et performantes.

Die Produktreihe Adan kombiniert extrem kleine Größen mit Lichtströmen, die für die Allgemeinbeleuchtung geeignet sind. Dank IP65 kann sie in Nassbereichen eingesetzt werden. Erhältlich in sieben Ausführungen, vier Farbtemperaturen und zwei extrem sauberen und effizienten Optiken.

La gama Adan combina el tamaño sumamente reducido con flujos luminosos adecuados para el alumbrado general. Gracias al grado IP65 se puede emplear en zonas húmedas. Disponible en siete acabados, cuatro temperaturas de color y dos ópticas sumamente netas y eficientes.



IP65 made in Italy

### Supply current


350-500mA (V, 8,7V)

### Power


3-6W

### Series wiring

### Dimensions




### Photometric diagrams



### CCT/CRI/Flux


	350mA	500mA
2700K	267lm	384lm
3000K	279lm	400lm
4200K	309lm	462lm
6000K	342lm	495lm

### Code construction

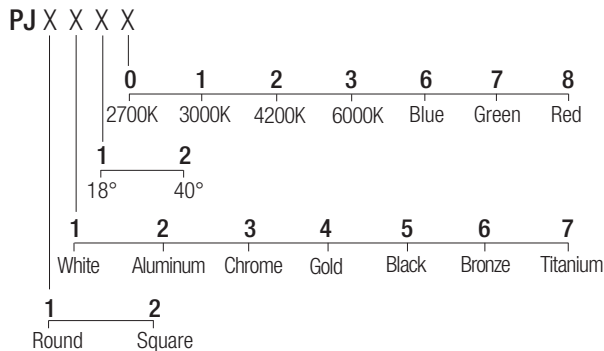

### Optionals

CS1005  
Recessing box



L001  
Low luminance louver



SC1001  
Milky screen



**Note:** the filter and the screen must be ordered together with the lighting fixture

### AL7022

24VDC/500mA constant current converter

### Drivers

