



TKL01-15



Design. Engineering. Quality. Service.



Power	15 W	Light Source	CREE ⇄ bridgelux.
CCT	Y W C	Luminous flux	1275 lm
D x H (mm)	70 x 210	Beam Angle	40°
		Input Volts	200-240 V





TKL01-25



Design. Engineering. Quality. Service.



Power	25 W	Light Source	CREE ⇄ bridgelux.
CCT	Y W C	Luminous flux	2125 lm
D x H (mm)	92 x 210	Beam Angle	40°
		Input Volts	200-240 V






TKL01-40

SmartLight™

Design. Engineering. Quality. Service.

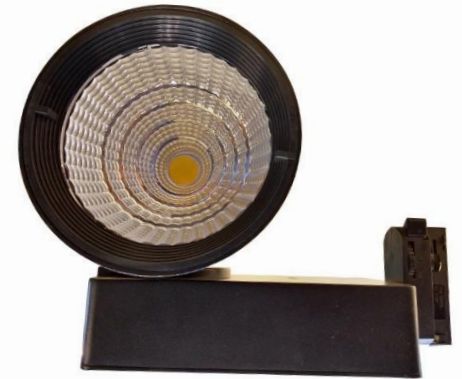

Power

40 W

Light Source

CREE ⇄ **bridgelux**

CCT

Y | W | C

Luminous
flux

3400 lm

D x H (mm)

125 x 275

Beam Angle

60°

Input Volts

200-240 V

